


Centos5?? Sendmail ????

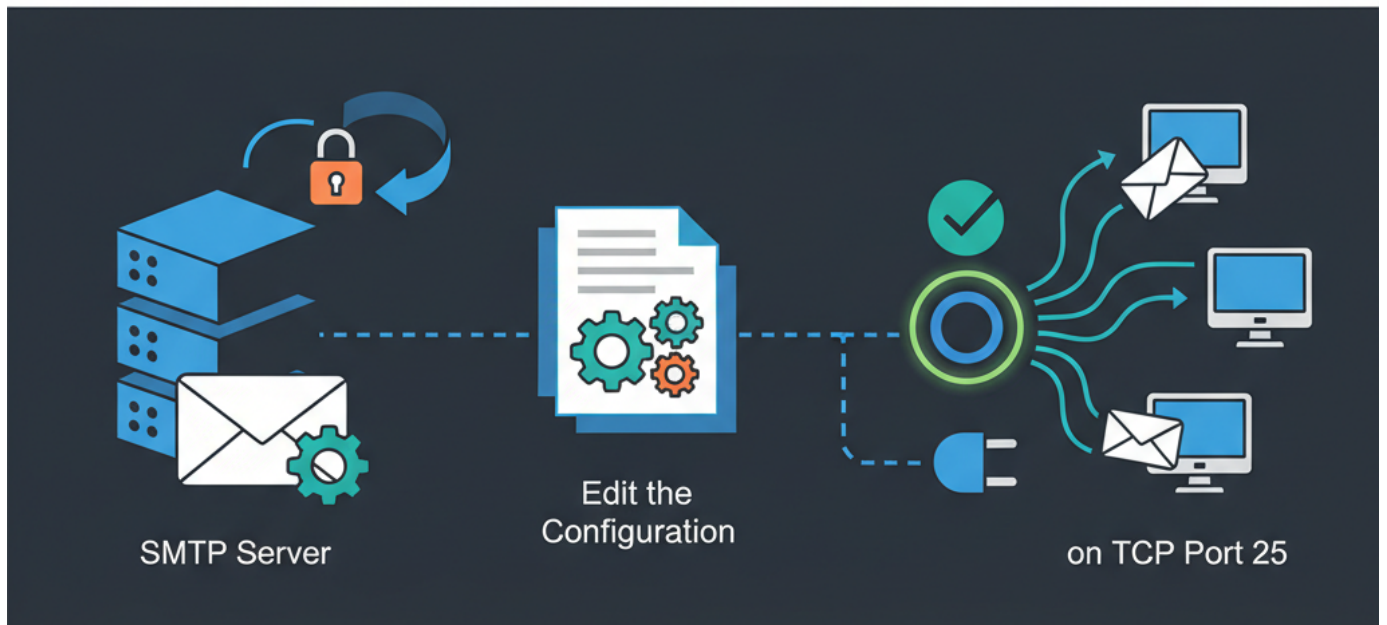

perplexity AI

1. Sendmail

```
$> yum install -y sendmail sendmail-cf
```

2. Sendmail

1. 配置 sendmail 的认证机制

```
$> vi /etc/mail/sendmail.mc
...
TRUST_AUTH_MECH(`EXTERNAL DIGEST-MD5 CRAM-MD5 LOGIN PLAIN')dnl
...
define('confAUTH_MECHANISMS', 'EXTERNAL GSSAPI DIGEST-MD5 CRAM-MD5 ( )')
```

2. 配置 sendmail 的端口和名称

```
$> vi /etc/mail/sendmail.mc
...
DAEMON_OPTIONS('Port=smtp, Name=MTA')dnl
...
```

3. 配置 sendmail 的本地域名

```
$> vi /etc/mail/sendmail.mc
LOCAL_DOMAIN('example.com')dnl
```

4. 配置 sendmail 的登录消息

```
$> vi /etc/mail/sendmail.mc
define('confSMTP_LOGIN_MSG')
```

5. 启动 sendmail 和 saslauthd

```
$> chkconfig sendmail on
$> chkconfig saslauthd on
$> /etc/init.d/sendmail start
$> /etc/init.d/saslauthd start
```

3. 验证

```
$> netstat -antp
Active Internet connections (servers and established)
Proto Recv-Q Send-Q Local Address Foreign Address State PID/Program name
tcp 0 0 0.0.0.0:25 0.0.0.0:* LISTEN 19466/sendmail
```

4. ☐ ☐ ☐☐

```
$> telnet localhost 25
mail from:☐☐☐☐
rcpt to:☐☐☐☐
data
send test
.
quit
(☐☐☐☐☐☐ ☐☐ ☐☐☐☐☐☐ ☐☐)
```

Revision #2

Created 2022-06-07 07:27:18 KST by artop0420

Updated 2026-02-03 23:33:12 KST by artop0420